

Assessment of driver vision functions in relation to their crash involvement in India

Ashish Verma^{1,5,*}, Neelima Chakrabarty²,
S. Velmurugan², B. Prithvi Bhat³,
H. D. Dinesh Kumar¹ and B. Nishanthi⁴

¹Department of Civil Engineering and ⁵Centre for Infrastructure, Sustainable Transportation and Urban Planning, Indian Institute of Science, Bengaluru 560 012, India

²Traffic Engineering and Safety Division, Central Road Research Institute, Mathura Road, New Delhi 110 025, India

³Central Institute of Road Transport, Pune 411 026, India

⁴Department of Civil Engineering, National Institute of Technology, Tiruchirappalli 620 015, India

Among the human factors that influence safe driving, visual skills of the driver can be considered fundamental. This study mainly focuses on investigating the effect of visual functions of drivers in India on their road crash involvement. Experiments were conducted to assess vision functions of Indian licensed drivers belonging to various organizations, age groups and driving experience. The test results were further related to the crash involvement histories of drivers through statistical tools. A generalized linear model was developed to ascertain the influence of these traits on propensity of crash involvement. Among the sampled drivers, colour vision, vertical field of vision, depth perception, contrast sensitivity, acuity and phoria were found to influence their crash involvement rates. In India, there are no efficient standards and testing methods to assess the visual capabilities of drivers during their licensing process and this study highlights the need for the same.

Keywords: Crash involvement, driver licensing, generalized linear modelling, visual functions.

DRIVING typically forms the primary and preferred approach of travel in many countries around the world¹, the ill consequences of which are road crashes. According to the report by the Ministry of Road Transport and Highways, Government of India², driver fault forms a significant share of the causes of road accident in India. Figure 1 shows the causal factors of road accidents in India in 2013, along with the percentage share.

Human functional failure can be assessed by identifying the limits in human functions that allow a person to adapt to changing situations, for example, experience, visual abilities, risk taking behaviour, etc. With respect to driving, human functional failures can arise from endogenous (inabilities of drivers) and/or exogenous factors (environment which influences endogenous factors)³.

Human functional failures along with their defective interactions with factors such as human, vehicle and environment are the key reasons for road accidents.

Human functions with respect to driving primarily include perceptual and/or cognitive performance such as visual performance, auditory skills, bio-mechanical skills, speed judgment and adaptation, reaction time, attention, etc.⁴⁻⁶. They can be broadly classified into two categories – physical and psychological. The present work focuses on identifying the relation between visual functions and crash involvement propensity of drivers in India.

Physical functions of drivers are important parameters in evaluating their safe driving abilities⁷. Vision skills are among the prominent physical functions that assist a driver in perceiving traffic situations. These functions are difficult to quantify and to consider them in road safety evaluation is a difficult task. In heterogeneous and complex traffic conditions commonly witnessed in India, drivers need to remain vigilant throughout, to safely respond to vehicles of different sizes coming their way abruptly from any direction. The complexities further magnify while driving heavy-vehicles. This has caused an increasing number of heavy-vehicle crashes in many Indian cities^{8,9}. Assessing the influence of visual abilities on crash involvement is essential in identifying the underlying causes of accidents due to driver fault.

A simple, multi-disciplinary test comprising of assessment of vision and cognitive tests, hazard perception and change detection tests was found to have a significant capacity to evaluate how safe or unsafe a driver is¹⁰. To assess visual fitness of a driver, visual acuity, contrast sensitivity and peripheral vision form critical components¹¹. Impairment in visual skills was found to be a significant causal factor for road crashes in drivers above the age of 70 years¹².

Several studies have been conducted worldwide to investigate the influence of visual skills on crash propensity.

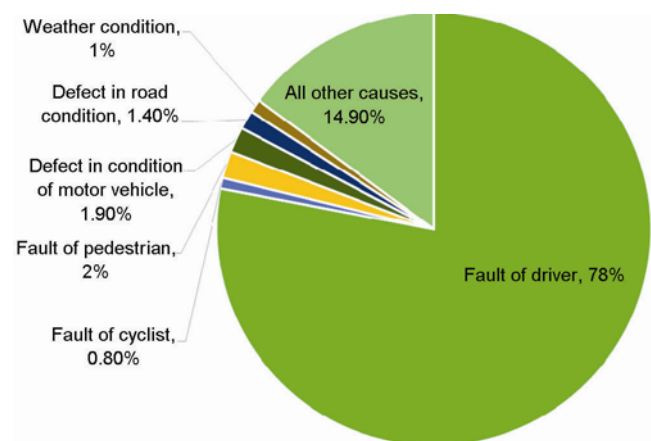


Figure 1. Causes of road accidents in India (2013).

*For correspondence. (e-mail: ashishv@civil.iisc.ernet.in)

Drivers with binocular visual acuity are found to have a higher crash risk compared to those with normal vision. In an experiment conducted by Hofstetter¹³, persons with binocular visual acuity problems reported double the accident risks compared to those with normal vision. Estimation of effect of binocular vision on road crash distributions of taxi drivers revealed that the average crashes per year were more in drivers with problems in binocular vision¹⁴. Recent research also supports the association of visual impairment and motor vehicle crashes, specifically in older drivers¹².

Depth perception plays an essential role in judging the speed of oncoming vehicles while driving. Inabilities in speed judgment may contribute to crash risks¹⁵. Researchers also believe that colour vision and glare recovery strongly associate with poor driving performances^{16,17}. Protanopia, defined as red-green colour blindness, is considered critical in the Australian driver licensing procedure. Since 1994, any person with protanopia is restricted from getting commercial driving licence in Australia. Studies reveal that regardless of severity, protanopia highly influences the risk of road accidents¹⁸.

Since many roads in India are undivided, overtaking vehicles often come in conflict with oncoming vehicles from the opposite end. In a road accident investigation study conducted on national highways, it was observed that all the nine head-on collisions observed on undivided highways were mainly due to overtaking vehicles entering into the oncoming vehicle lane¹⁹. Tendency of not maintaining safe stopping sight distance is also a drawback among many Indian drivers, leading to risky situations on Indian roads. In such cases satisfactory depth perception becomes important in ensuring the safety of drivers.

Glare can be defined as the sensation caused when bright light is flashed in front of one's eyes, obstructing his/her vision for a couple of seconds. This is a common phenomenon witnessed in night-time driving due to the use of high beam lights. Time taken to recovery from this glare varies in individuals depending on their age and vision conditions. Glare increases reaction time in drivers, thereby influencing their safety in a negative manner^{20,21}. Again, due to the presence of many undivided roads in India, acceptable glare recovery is important to avoid collisions.

In simple terms, contrast sensitivity can be defined as the ability to distinguish between an object from its background. Studies have shown that persons with contrast sensitivity impairment restrict themselves from driving, thereby reducing their annual mileage. This self-regulation is mainly seen due to the increased risk of motor vehicle collisions²². Also, depth perception of on-coming vehicles is affected by contrast sensitivity²³⁻²⁵. Influence of phoria on driving performance was ascertained in the studies conducted by Burg²⁶.

Performance of drivers with central field of vision impairment and normal peripheral vision was evaluated in a study conducted by Lamble *et al.*²⁷. It was observed that the reaction time of these drivers was higher compared to those with normal vision. Also, persons with central vision loss had a greater likelihood of involving in night-time crashes²⁸. Drivers with binocular visual field loss were found to have a higher crash and conviction risk compared to those with normal vision²⁹.

Table 1 summarizes the significance of each of the above-mentioned vision parameters in relation to driving.

Vision test is an essential component of commercial driver licensing in the United States. All states in the US have visual acuity requirements for licensure, and all but three have set the minimum 'best corrected visual acuity' (BCVA) requirement at 20/40 in the better eye. Georgia requires a BCVA of at least 20/60 in at least one eye; for New Jersey and Wyoming, the requirement is 20/50. For the 34 states with a binocular horizontal visual field requirement, 15 stipulate 140°; for the other 19 states, the range is from 105° to 130°; Maine requires 150°. Several states list the horizontal dimension of the visual field of applicants with only one useful eye; this ranges from 55° (Kansas) to 105° (Arkansas). Some states, including North Carolina and Texas, do not issue any driver's licence to a person with homonymous hemianopia (loss of vision in the right half or left half of both eyes). Only Kentucky has a vertical visual field requirement: 25° above and below the fixation point³⁰.

In the United Kingdom, separate vision test standards are followed for private driver licence and commercial driving licence (for bus and lorry drivers) applicants. For private driver licence, a minimum visual acuity of 6/12 for both eyes, as measured in Snellen's chart is required. Also, adequate field of vision that is attested by an ophthalmologist is essential. For bus and lorry drivers, visual acuity of 6/7.5 at least in the best eye and 6/60 in the other is mandated. Horizontal field of vision of 106°, with extensions not less than 70° towards left and right and 30° above and below, with no defects in the central field of 30° is also a must³¹.

Australia also follows separate vision requirements for private driver licence and commercial driving licence. A minimum of 6/12 visual acuity in the better eye or both eyes is essential to avail unconditional private driving licence. Conditional licence is considered for applicants who meet these standards with corrective lenses. For commercial driving licence, a minimum visual acuity of 6/9 in the better eye and 6/18 in the worse eye is required. For applicants with visual acuity worse than 6/24, driver licence is rejected. Horizontal field of vision extending up to 110° and 10° respectively, above and below the horizontal midline is mandatory for private driver licence, whereas for commercial licence it is 140° and 10° respectively, above and below the horizontal midline. Colour vision, except for protanopia, is not a mandatory

Table 1. Characteristics of Vision skills in relation to traffic situations

Visual parameters	General characteristics	Characteristics in relation to traffic situations	Inputs from the literature review
Visual acuity	Ability to see small details clearly	Reading distant traffic signs	Defects in visual acuity results in doubled crash risk
Colour vision	Distinguishing different colours	Identification of traffic signals	Negatively affects driving performance
Phoria	Coordination of both eyes to correctly identify the placement of an object ahead	To identify the position of a vehicle or an obstruction in front of the driver correctly	Affects driving performance
Depth perception	Judgement of distance between objects	Passing on two-lane road with oncoming traffic	Defects in depth perception pose serious problems while overtaking
Contrast sensitivity	Seeing objects in similar brightness as that of colour	Detecting dark-coloured pedestrians at night	Poor contrast sensitivity increases risk of motor vehicle collision
Glare recovery	Ability to resist and recover from glare	Reduction in visual performance due to headlight glares	Poor glare recovery significantly increases reaction time resulting in accident risk
Peripheral vision	Detection of objects at the sides of the visual fields	Seeing two wheelers approaching from sides	Defects in visual field increase reaction time of drivers and likelihood of night-time crashes

Source: *Traffic Engineering Hand Book*, Institute of Transportation Engineers, 1999, 5th edn and previous literature.

requirement in the Australian driver licensing procedure for private vehicles³².

India follows a 'single-phase licensing system', which recommends a single phase of driver education and training prior to the written and driving test. Driver education is not mandatory and physical fitness of candidates with respect to visual abilities, hearing, etc. is not evaluated before issuing driver licence. Only the manoeuvring abilities of drivers are considered sufficient for granting the licence³³.

Among the above-mentioned visual parameters, acuity is the only parameter evaluated as part of the vision test conducted to issue driving licence in India. According to the Motor Vehicle Act 1988 and Central Motor Vehicles Rules 1989, a self-declaration, medical certificate from a registered medical practitioner is sufficient to qualify in the vision test for driver licence, making the law relaxed. Also, the laws are similar for all, irrespective of age and individual characteristics⁵. These lacunae in the present system of driver licensing need immediate attention in order to address road safety issues in India.

The standards followed in other countries may not be directly applicable in aptly assessing driver visual capabilities in India. Therefore, there is an inherent need for extensive research focusing on the area of road safety. Considering these issues, the following objectives have been formulated for the present study to emphasize on the importance of vision functions of drivers influencing road crash involvement in India.

- Evaluating the influence of vision parameters of the drivers on their road crash involvement in India.
- To identify critical driver vision parameters affecting safe driving ability in Indian conditions.

It is evident from the past literature that 'visual functions' are among the crucial physical parameters in relation to safe driving performance. This study attempts to assess the effect of these parameters on crash involvement of Indian drivers.

Three hundred and eight-seven Indian drivers belonging to different organizations, age groups and driving experience volunteered for the study. The sample included drivers from the Karnataka State Road Transport Corporation (KSRTC), which is one of the major public transport undertakings in India established in 1961; Bangalore Metropolitan Transport Corporation (BMTC), which is a Government agency that operates the public transport bus service within Bengaluru, India; Vijayanand Roadlines Limited (VRL), which is one of the leading private business groups in road transportation and logistics in Karnataka, India along with some volunteers from Indian Institute of Science (IISc) Bengaluru and learner licence applicants and licence renewal aspirants at the Road Transport Office (RTO), Yeshwanthpur, Bengaluru.

The random sample has been categorized based on age to confirm whether there is reasonable representativeness of the population. Table 2 gives details of sample size with respect to age.

Table 2. Sampling details

Organization	Category of vehicle driven/gender	Age category (years)	Sample	
			Number of drivers	Percentage
KSRTC	Bus drivers/male	20–30	40	25
		31–45	80	50
		46–60	40	25
		Total	160	100
		($\mu = 38.1$; $\sigma = 9.16$)		
BMTC	Bus drivers/male	20–30	4	5.13
		31–45	47	60.26
		46–60	27	34.62
		Total	78	100
		($\mu = 42.82$; $\sigma = 8.01$)		
VRL	Bus and freight vehicle drivers/male	20–30	11	22
		31–45	26	52
		46–60	13	26
		Total	50	100
		($\mu = 36.9$; $\sigma = 8.64$)		
IISc	Private vehicle drivers/male and female	20–30	27	47
		31–45	16	28
		46–60	14	25
		Total	57	100
		($\mu = 37.14$; $\sigma = 12.51$)		
RTO	(Learner/driver/renewal licence applicants) private vehicle drivers/male and female	20–30	25	104
		31–45	11	46
		46–60	7	29
		Total	43	100
		($\mu = 31.81$; $\sigma = 11.79$)		
Total sample		20–30	106	27
		31–45	180	47
		46–60	101	26
		Total		
		($\mu = 129$; $\sigma = 44.24$)	387	100

Personal details and road crash histories of tested drivers were obtained from organizational databases. For some samples such as personal vehicle drivers from IISc and RTO, where organizational databases were unavailable, a structured questionnaire was used to collect accident history information from the participants. As drivers participated in the study voluntarily, they were willing to provide data. The data were used to relate the vision test results to the crash involvement tendency of the tested drivers. The collected data included age of the driver, number of years of driving experience and number of crashes he/she has been involved in.

Driver vision skills were tested using ‘DVS-GT Deluxe Vision Screener – Model # 1158WE’ instrument. The visual functions tested included visual acuity, colour vision, phoria, night vision, depth perception, contrast sensitivity, glare recovery, peripheral vision and vertical field of vision. Appendix 1 provides the test criteria used to evaluate the drivers.

The tested drivers were categorized as acceptable (1) or unacceptable (2) based on test results. The vision eval-

uation standards adopted in this study are followed worldwide by ophthalmologists for general vision testing and also in the licensing system of some countries (for example: Washington, USA) to screen applicants for driver licence.

The data obtained during the study were tabulated and coded for further analysis. Ratio analysis and z-test of the sample were conducted. A generalized linear model (GLM) was developed using univariate analysis of variance (ANOVA) and one-way ANOVA with repeated measures. GLME is an extension of classic linear modelling incorporating response variables that follow any probability distribution in the exponential family³⁴, initially coined by Nelder and Wedderburn. The explanatory variables in this study (vision test results) were qualitative and of categorical form, whereas the response variables were quantitative (number of crashes). GLM was found to be the most appropriate method for such data types, whose means do not follow normal distribution and instead are multiplicatively related to the explanatory variables³⁵.

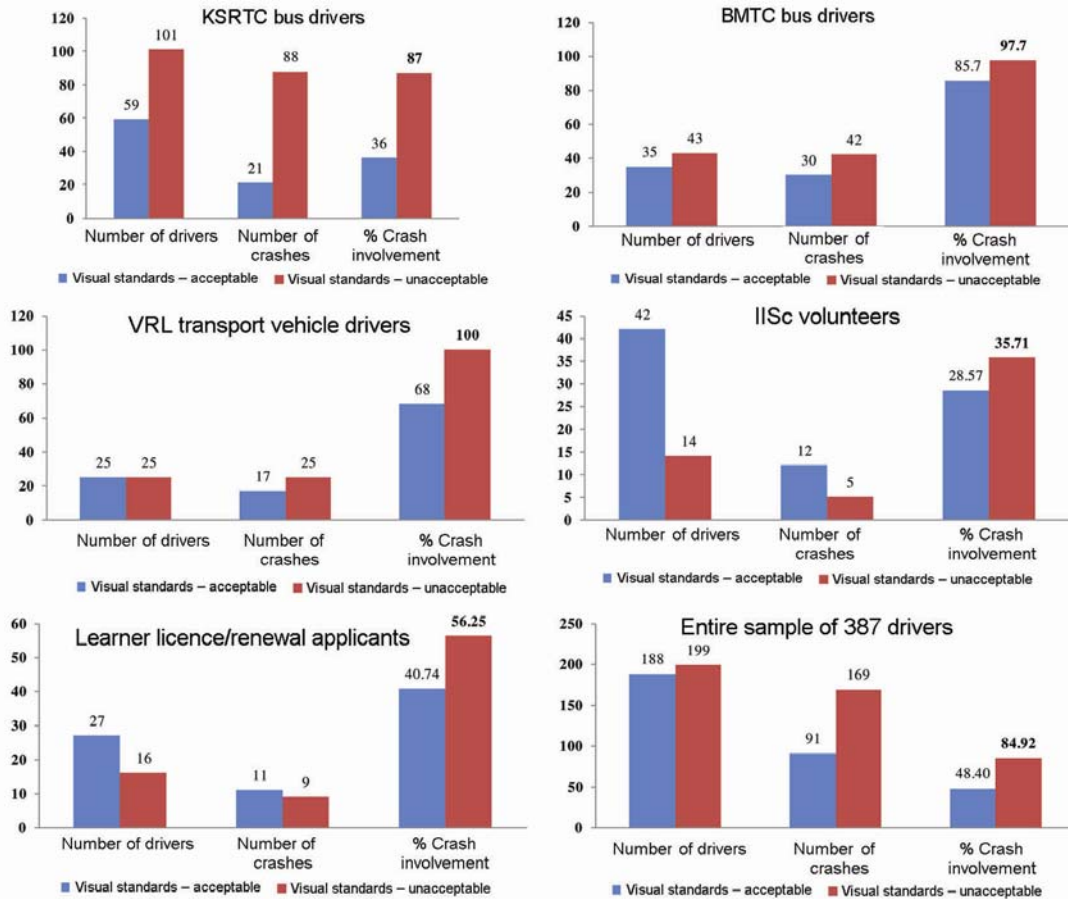


Figure 2. Ratio analysis results.

The vision test results of all the above-mentioned samples have been summarized and the percentage of road crash involvement of the tested drivers with respect to the vision test results has been obtained from ratio analysis (Figure 2).

The vision test results reveal that out of the 160 KSRTC drivers tested, 101 have at least one visual defect, i.e. 63.75% of the drivers did not satisfy the minimum vision requirements for driving. A simple comparison of the road crash histories of the drivers to the vision test results shows that the crash involvement rates are high (up to 87%) in drivers categorized as ‘unacceptable’. The number of BMTC drivers involved in road crashes with unacceptable vision standards is high (58.3%) when compared to those with acceptable visual standards.

Among 50 drivers tested from VRL, 50% qualified the required standards, whereas the other 50% failed in at least one of the tested vision parameters. Fifty-six volunteers (both male and female) from IISc, including professors, research students and administrative staff were tested for vision. It is important to note that the crash histories of these tested subjects were obtained from self-reports. The vision test results and the road crash details showed that the drivers with visual defects were involved

in a relatively higher number of road crashes compared to those with normal vision. Forty-three learning licence/driver licence/licence renewal applicants from the RTO at Yeshwanthpur, were also tested as a part of the study. Twenty-seven of them qualified with acceptable visual standards, while 16 did not. Significant number of road crashes of novice drivers was observed in this sample group, although they do not have a permit to ride. Leniency of the present licensing system and traffic law enforcement methods in India are depicted in these cases.

Table 3 shows the cumulative test results of the entire sample of 387 drivers. More than half of the entire sample (52%) failed in at least one of the vision parameters tested. The percentage crash involvement of subjects with at least one visual disability was significantly higher (81%) than those without visual disability.

Two-tailed z -test was also conducted to verify whether there is significant difference between the crash rates of drivers with visual defects and those with normal vision. Table 4 presents the z -test results of the entire sample based on the following hypothesis: (i) null hypothesis, $H_0 : \mu_0 = \mu_1$ and (ii) alternate hypothesis, $H_1 : \mu_0 \neq \mu_1$, where μ_0 is the mean of the sample of number of accidents by drivers with visual defects, and μ_1 is the mean of

Table 3. Aggregate vision test results

Vision parameters	Vision test results		Crashes involved		Percentage of crash involvement	
	Unacceptable	Acceptable	Unacceptable	Acceptable	Unacceptable	Acceptable
Left eye acuity	45 (12%)	342 (88%)	44	217	98	63
Right eye acuity	60 (16%)	327 (84%)	62	199	103	61
Night vision	39 (10%)	348 (90%)	36	225	92	65
Acuity (both eyes)	38 (10%)	349 (90%)	36	225	95	64
Colour vision	56 (14%)	331 (86%)	33	228	59	69
Phoria	6 (2%)	381 (98%)	2	259	33	68
Contrast sensitivity	17 (4%)	370 (96%)	18	243	106	66
Glare recovery	25 (6%)	362 (94%)	23	238	92	66
Depth perception	111 (29%)	276 (71%)	106	155	95	56
Peripheral vision	6 (2%)	381 (98%)	6	255	100	67
Vertical field of vision	85 (22%)	302 (78%)	77	184	91	61
Drivers with unacceptable standard in at least one of the tested parameters	201 (52%)	186 (48%)	162	99	81	53

Table 4. z-test results

Parameters	Accidents by drivers with visual defects	Accidents by drivers without visual defects
Mean	0.803191489	0.587939698
Variance	1.132182273	1.112177047
Observations	188	199
Hypothesized mean difference	0	
<i>z</i>	1.997609288	
<i>P</i> (<i>Z</i> ≤ <i>z</i>) one-tail	0.022879518	
<i>Z</i> critical one-tail	1.644853627	
<i>P</i> (<i>Z</i> ≤ <i>z</i>) two-tail	0.045759036	
<i>Z</i> critical two-tail	1.959963985	

Table 5. Descriptive statistics

Vision defect	Mean	Standard deviation	<i>N</i>
1 – Sample with at least one vision defect	0.59	1.055	199
2 – Sample with no vision defect	0.80	1.064	188
Total	0.69	1.063	387

the sample of number of accidents by drivers without any vision defects (normal vision).

Here, *z*-statistics is greater than the *z* critical in the two-tail *z*-test. This implies that the obtained *z*-statistics lies in the rejection area of the normal distribution of the sample. Hence, the null hypothesis *H*₀ can be rejected, which leads to the acceptance of the alternate hypothesis *H*₁. The result of the analysis is that the means of the samples of the number of accidents of drivers with and without vision defects are different. This indicates that there is significant influence of vision defects over crash association of tested drivers.

GLM was also done to verify whether there is significant difference between the crash rates of drivers with

visual defects and those with normal vision. Tables 5 and 6 provide the results.

The results show there is significant influence (*σ* values <0.05.) of vision defects on crash involvement of tested drivers. Also, using GLM, the influence of particular visual defects on the crash rate of drivers has been analysed. Tables 7 and 8 presents of GLM results.

Here, dependent variable is the number of accidents and the independent variables (fixed factors) are the visual defects – acuity, binocular, colour blindness, phoria, depth perception, contrast sensitivity, glare recovery, peripheral vision, nasal vision and vertical vision. The effect of the fixed factors (visual defects) on the dependent variable (number of accidents) is observed using GLM one way ANOVA with repeated measures on the data.

A repeated measures ANOVA with a greenhouse–Geisser correction revealed that mean number of accidents differed statistically significantly between vision defect points (*F*(6.276, 2422.50) = 36.602, *P* < 0.0005). Post hoc tests using Bonferroni correction revealed that individual vision defects have influence over the number of accidents. The decreasing order of the influence being phoria, peripheral vision, contrast sensitivity, binocular vision, glare recovery, acuity, vertical vision, colour blindness, nasal vision and depth perception.

The primary goal of the present study was to identify and assess the effect of visual disabilities of drivers on their crash involvement. In the present study, the following uncertainties were observed in the collected data: (a) The crash histories of private vehicle drivers (from IISc and RTO) were collected through self-reports. The data are based on the assumption of their truthfulness. (b) The maximum number of crashes of the tested drivers from KSRTC, BMTC and VRL does not exceed five. This is due to the fact that drivers with more than five crashes are usually dismissed from these organizations. Also, the

Table 6. Test of between-subject effects

Source	Type III sum of squares	df	Mean square	<i>F</i>	σ	Partial eta squared
Corrected model	4.479 ^a	1	4.479	3.992	0.046	0.010
Intercept	187.084	1	187.084	166.757	0.000	0.302
Vision defect	4.479	1	4.479	3.992	0.046	0.010
Error	431.929	385	1.122			
Total	622.000	387				
Corrected total	436.408	386				

^a*R* squared = 0.010 (adjusted *R* squared = 0.008).

Table 7. Descriptive statistics

Parameters	Mean	Standard deviation	<i>N</i>
Left eye acuity	1.94	0.237	387
Right eye acuity	1.95	0.216	387
Binocular night mode	1.97	0.180	387
Binocular day mode	1.96	0.199	387
Colour test	1.92	0.276	387
Phoria	1.99	0.101	387
Depth perception	1.75	0.435	387
Contrast sensitivity	1.97	0.166	387
Glare recovery	1.95	0.222	387
Peripheral vision	1.98	0.124	387
Nasal vision	1.79	0.407	387
Vertical upward vision	1.93	0.255	387
Vertical downward vision	1.94	0.241	387

complete crash histories of the tested subjects (before joining the organization) were not available.

The results show a significant relation between road-crash tendencies of drivers and visual defects such as phoria, peripheral vision and contrast sensitivity.

It is important to note in the present study that drivers with no visual defects were also involved in crashes. In these cases, the causal factors other than vision such as environment, road condition, psychological condition of the driver, etc. may have been the significant underlying cause for the road crashes.

Another interesting aspect observed from the study is that many of the licensed drivers tested did not qualify the minimal vision standards. A similar study conducted at Guwahati, Assam also identified several shortcomings in the visual capabilities of licensed drivers⁵. It was observed that out of the 189 licensed drivers tested for vision, 3% failed in phoria, 12% in the depth judgement, 7% in glare recovery, 5% in nasal vision, 15% in acuity, 5% in night vision, and 5% in colour vision. These results depict the flexibility in the current licensing practices, which may ultimately reduce driving safety. The test results emphasize the need for stringent scrutiny, particularly of the commercial vehicle drivers prior to their licensing and employment.

In practice, visual acuity, visual field and colour vision are the mandatory vision requirements in many of the International driver licensing systems, including Canada,

Germany, USA and Australia. Table 9 shows a comparison between some of the vision requirements, nationally (with respect to India) and internationally.

Apart from the aforementioned parameters the influence of phoria, contrast sensitivity, depth perception, etc. has been closely scrutinized in this study and is realized to have critical influence on road safety.

From the present study it is empathized that vision tests are to be made an integral part of the recruitment process of drivers, especially for commercial and public services. In order to address this issue of road safety in the present scenario, vision skill evaluation and vision rectification programmes need to be conducted for the drivers already employed as a part of safe driving performance enhancement programmes. Awareness sessions should also be considered as a vital step towards providing a platform for the drivers for self-realization and assessment of their visual limitations and further assistance in seeking medical aid in resolving the problem. Along with these measures, planned scheduling of drivers with night vision and glare recovery problems to prevent them from night-time driving can be taken up to improve safety of passengers and other road users.

Road safety is a critical issue that needs focus in this era of increased road-crash deaths. India is one of the perilous countries in terms of road fatalities in the world. The motivation behind this study was to scientifically analyse the effect of vision functions on road crashes. Different visual functions and their influence on road-crash involvement were reviewed by assessing them with the help of 'DVS-GT deluxe vision screener' instrument. A total of 387 drivers from various organizations volunteered for the study. Road-crash histories of the subjects were also collected. The results were analysed using statistical tools.

This study helps in understanding the importance of visual requirements for safe driving. It highlights the importance of addressing the road safety issue collectively using 3Es: education, engineering and enforcement with respect to driver vision as well. The method adopted in the study proves to be useful in screening candidates during the issue of driver licences.

Vision parameters other than the general acuity such as peripheral vision, contrast sensitivity, glare recovery, etc. have been found to effect safety performance of drivers.

RESEARCH COMMUNICATIONS

Table 8. Tests of between-subjects effects

Source	Type III sum of squares	df	Mean square	F	σ	Partial eta squared
Intercept	18655.803	1	18655.803	121804.954	0.000	0.997
Error	59.120	386	0.153			

Table 9. Vision requirement standards for safe driving

Vision parameters	Specifications	International standards	Indian standards
Visual acuity	6/12 (0.5) or better	No visual acuity-based objection. Provision of unrestricted driving licence even if acuity could be further improved by glasses or lenses	6/18 or better
	<6/12 (<0.5) to 6/60 (0.1)	Individual consideration, which may result in restriction or denial. Evaluation should include visual and non-visual factors and a road test when in doubt. Some licences may be granted	
	<6/60 (<0.1)	No driving licence	
Field of vision	120° horizontal, 40° vertical or better	No visual field-based objection. Provision of unrestricted driving licence, provided that the field is about evenly divided around fixation and that no attention-related problems are identified	Not considered
	Worse	Individual consideration, which may result in restriction or denial. Evaluation should include visual and non-visual factors and a road test when in doubt. Some licences maybe granted, some may not	
Colour test	To identify the difference between red and green	Required to pass colour test	Not considered

Source: Vision requirements for driving safety – International Council of Ophthalmology, 2005.

Appendix 1. Criteria used to categorize vision screening results

Type of test	Test procedure	Acceptable	Unacceptable
Visual acuity – right eye, left eye, and for both eyes (night and day mode)	The subject is made to identify numbers of varying sizes that appear on the screen.	Vision range between 6/6 and 6/12.	Vision range more than 6/12.
Colour test (green, red and yellow)	The subject is asked to identify the colours he/she is able to see on the screen.	If subject identifies all three colours.	If the subject does not identify colours correctly.
Phoria/Binocular vision	The subject is made to identify the placement of a red dot that is visible on the screen.	Dot within rectangle.	Dot outside the rectangle.
Depth perception (subject is asked to identify six traffic signs and asked which is farther and which is nearer)	The subject is asked to identify some of the road sign targets placed at different positions and is also asked to distinguish the targets that appear relatively closer or farther.	If both near and far signs are observed correctly.	If the subject fails to identify the position of close and far away signs.
Contrast sensitivity	In night mode, the subject is presented with numbers in three columns with an acuity of 6/21, each column set at different contrast.	If subject is able to read within 40% contrast.	If the subject is unable to read within 40% contrast.
Glare recovery	In night mode, the subject is exposed to illuminated flash of light for a period of 3 sec, and asked to read numbers on screen within 5 sec.	If the subject identifies at least six out of seven numbers in any one line.	If the subject fails to read at least six out of the given numbers in any line.
Horizontal field vision test	The subject is asked to identify LED targets kept at 55°, 70° and 85° angles. This test is conducted for each eye separately.	If the subject identifies the LED targets @ 70° or 85°.	If the subject fails to identify all targets at 70° or 85°.
Vertical field vision test – both upper and lower	The subject is asked to identify LED targets kept at 35° angle in the vertical plane. This test is conducted for each eye separately.	If the subject identifies the target.	If the subject fails to identify the target.

Source: Keystone DVS-GT Deluxe Record Form for use with Model 1158.

*Note: 6/6 vision refers to normal vision indicated by the ability to accurately read the vision test chart placed at a distance of 6 m from the eye. 6/12 vision refers to the ability to accurately read the vision test chart placed at a distance of 6 m, which a normal vision person can read from a distance of 12 m.

These tests are required to be made mandatory for commercial and public service vehicle drivers to begin with. There is a huge need to amend the Indian standards of vision testing for drivers. The governing laws in India with respect to driver licensing procedures need to be appropriately amended to create safe drivers by strict visual screening before issuing driving licence. Persons with unacceptable standards of visual functions must either be issued a regulated driving licence or licence must be issued only after the problem is medically rectified, if possible.

The present road accident investigation practices followed in India do not include a systematic methodology to test the visual defects in the driver at the time of accident. Therefore, scientific and accurate data to correlate the vision defect of drivers to their crash involvement are unavailable. However, this can form a scope in future studies wherein road accident investigations are conducted with assessment of visual functions of the driver, based on which a detailed study can be conducted. An enhanced and representative sample size of drivers from all vehicle categories and driving experiences is required to obtain results that are more representative. Also, other physical parameters such as auditory skills, limb strength, reaction time, etc. and psychological parameters such as sensation seeking, driver fatigue, aggression, etc. play an important role in safe driving activity. Therefore, a thorough study is necessary to clearly understand the effect of overall human factors on safe driving. A real-time evaluation of these psychophysical parameters would allow a better appreciation of their influence on driving. Experimental studies using EEG signals, heart rate variation, etc. may be adopted in this direction.

Another important aspect that requires consideration is the calibration of the test methodology adopted in the present study. This is essential to assess its adaptability for testing in Indian conditions to provide a better insight regarding the influence of visual skills on Indian road safety. Further, calibration of the test methodology becomes necessary for incorporation in practical issues such as traffic engineering, policy-making, education and enforcement.

1. Hu, P. S. and Reuscher, T. R., Summary of travel trends: 2001 national household travel survey. Transportation Research Board, USA, 2004.
2. Road accident in India, Ministry of Road Transport and Highways, Government of India, 2013.
3. Elslande, V. P. and Fouquet, K., Analyzing human functional failures in road accidents, TRACE, Final report, 2007.
4. Evans, L., *Traffic Safety*, Science Serving Society, Michigan, 1991.
5. Chauhan, S. and Verma, A., Assessing the impact of driver attributes on road safety and mobility. In XVI Pan American Conference on Traffic and Transport (PANAM-2010), Lisbon, Portugal, 2010.
6. Dewar, R. E., Olson, P. L. and Alexander, G. J., *Human Factors in Traffic Safety*, Lawyers & Judges Publishing Company, Tuscon, Arizona, 2007, 2 edn.
7. Anstey, K. J., Wood, J., Lord, S. and Walker, G. J., Cognitive, sensory and physical factors enabling safety in older adults. *Clin. Psychol. Rev.*, 2005, **25**, 45–65.
8. Singh, H. and Dhatarwal, S. K., Pattern and distribution of injuries in fatal road traffic accidents in Rohtak. *J. Indian Acad. Forensic Med.*, 2004, **26**(1), 20–23.
9. Kaul, A., Sinha, U. S., Pathak, Y. K., Singh, A., Kapoor, A. K., Sharma, S. and Singh, S., Fatal road traffic accidents, study of distribution, nature and type of injury. *J. Indian Acad. Forensic Med.*, 2005, **27**(2), 71–76.
10. Wood, J. M., Horswill, M. S., Lacherez, P. F. and Anstey, K. J., Evaluation of screening tests for predicting older driver performance and safety assessed by an on-road test. *Accid. Anal. Prevent.*, 2013, **50**, 1161–1168.
11. Matas, N. A., Nettelbeck, T. and Burns, N. R., Cognitive and visual predictors of UFOV performance in older adults. *Accid. Anal. Prevent.*, 2014, **70**, 74–83.
12. Friedman, C., McGwin, G. J., Ball, K. and Owsley, C., Association between higher order visual processing abilities and a history of motor vehicle collision involvement by drivers aged 70 and over. *Invest. Ophthalmol. Vis. Sci.*, 2013, **54**(1), 778–782.
13. Hofstetter, H. W., Visual acuity and highway accidents. *J. Am. Optom. Assoc.*, 1976, **47**(7), 887–893.
14. Maag, U., Vanasse, C., Dionne, G. and Laberge-Nadeau, C., Taxi drivers accidents: how binocular vision problems are related to their rate and severity in terms of the number of victims. *Accid. Anal. Prevent.*, 1997, **29**(2), 217–224.
15. Poulter, D. R. and Wann, J. P., Errors in motion processing amongst older drivers may increase accident risk. *Accid. Anal. Prevent.*, 2013, **57**, 150–156.
16. Desapriya, E., Harjee, R., Brubacher, J., Hewapathirane, C. H. D. S., Subzwari, S. and Pike, I., Vision screening of older drivers for preventing road traffic injuries and fatalities (review). *Cochrane Database of Systematic Reviews*, Canada, 2014.
17. Javitt, J. C., Risk of motor vehicle crashes in patients with cataract surgery. *JAMA*, 2002, **288**(18), 2262.
18. Cole, B. L., Protan colour vision deficiency and road accidents. *Clin. Exp. Optom.*, 2002, **85**(4), 246–253.
19. Padmanaban, J., Rajaraman, R., Narayan, S., Ramesh, B. and Stadter, G., Analysis of in-depth crash data on Indian national highways and impact of road design on crashes and injury severity. In 4th International ESAR Conference, Hanover, Germany, 2010.
20. Nighttime glare and driving performances, National Highway Traffic Safety Administration, USA, 2007.
21. Tang, Y. B., The effects of age and glare on driving, Doctoral dissertation, The Hong Kong Polytechnic University, 2012.
22. Sandlin, D., McGwin Jr, G. and Owsley, C., Association between vision impairment and driving exposure in older adults aged 70 years and over: a population based examination. *Acta Ophthalmol.*, 2014, **92**(3), 207–212.
23. Snowden, R. J., Stimson, N. and Ruddle, R. A., Speed perception fogs up as visibility drops. *Nature*, 1998, **392**, 450.
24. Stone, L. S. and Thompson, P., Human speed perception is contrast dependent. *Vis. Res.*, 1992, **32**, 1535–1549.
25. Thompson, P., Brooks, K. and Hammett, S. T., Speed can go up as well as down at low contrast: implications for models of motion perception. *Vis. Res.*, 2006, **46**, 782–786.
26. Burg, A., Horizontal phoria as related to age and sex. *Transp. Res. Board*, 1968, **45**(6), 345–350.
27. Lambale, D., Summala, H. and Hyvärinen, L., Driving performance of drivers with impaired central visual field acuity. *Accid. Anal. Prevent.*, 2002, **34**(5), 711–716.
28. Szlyk, J. P., Fishman, G. A., Severing, K., Alexander, K. R. and Viana, M., Evaluation of driving performance in patients with juvenile macular dystrophies. *Arch. Ophthalmol.*, 1993, **111**(2), 207–212.

29. Johnson, C. A. and Keltner, J. L., Incidence of visual field loss in 20,000 eyes and its relationship to driving performance. *Arch. Ophthalmol.*, 1983, **101**(3), 371–375.
30. Steinkuller, P. G., Legal vision requirements for drivers in the United States. *Am. Med. Assoc. J. Ethics*, 2010, **12**(12), 938–940.
31. Government of UK (n.d.), Retrieved from www.gov.uk; <https://www.gov.uk/driving-eyesight-rules>
32. Optometry Victoria Strategic Plan 2015–18 (n.d.). *Optometry Australia*, Retrieved from www.optometry.org.au; <http://www.optometrists.asn.au/vic/practiceinfo/driving-vision-standards.aspx>
33. Verma, A., Velmurugan, S. and Chakrabarty, N., Recommendations for driver licensing and traffic law enforcement aiming to improve road safety. *Curr. Sci.*, 2011, **100**(9), 1373–1385.
34. Kim, S. H., Chung, S. B. and Song, K. S., Development of an accident prediction model using GLM (generalized log-linear model) and EB method: a case of Seoul. *J. East. Asia Soc. Transp. Stud.*, 2005, **6**, 36669–36682.
35. Nelder, J. A. and Baker, R. J., Generalized linear models. *Encycl. Stat. Sci.*, 1972, **135**(3), 370.

ACKNOWLEDGEMENTS. We thank the Council of Scientific and Industrial Research, New Delhi for funds (Project No. 70(0067)/11/EMR-II). We also thank KSRTC, BMTC, VRL, IISc, Bengaluru and RTO (Yeshwanthpur, Bengaluru) for providing sample drivers for the study and also the required accident histories of the tested drivers. Also, we would like to thank M-Tech students Ms Aparna N. S. L, from NIT Trichy, and Mr Rohit S., from Reva Institute of Technology and Management, Bangalore for data compilation and assistance in the analyses.

Received 5 December 2014; revised accepted 27 October 2015

doi: 10.18520/cs/v110/i6/1063-1072

Study of traffic noise in urban street canyons of Bengaluru city

Halesh Koti^{1*}, G. Ranganath¹ and H. N. Rajakumara²

¹Mechanical Engineering Department, Adhiyamaan College of Engineering, Hosur 635 109, India

²Civil Engineering Department, R.R. Institute of Technology, Chikkabanavara, Bengaluru 560 090, India

In urban street canyons, external noise environment is a critical restriction to the opening of building windows for natural ventilation. The high external noise intensities are often used to substantiate the utilization of air conditioning systems in residential and commercial buildings. Therefore, a systematic method of examining the noise levels in urban street canyons is essential if the potential for natural ventilation is to be estimated. The noise levels and natural ventilation in urban street canyons depend on many aspects such as

existing street dimensions, height of buildings and traffic density. A study has been carried out in a street to examine the variation in noise levels vertically in order to provide technical inputs on natural ventilation potential in urban street canyons. In this study, a number of noise measurements were made in urban street canyons of Bengaluru City, in residential and commercial areas with respect to aspect ratio (height of building/street width) changing from 1.0 to 4.0. With the help of measured data, a statistical model was developed. A linear regression analysis has been used. The model can be used to predict variation of noise level in vertical direction in urban street canyons. The variation of noise level is found to be a function of street width and height of a building above the street level, but the highest level of reduction is almost entirely a function of the aspect ratio. The rate of attenuation of foreground noise (L_{10}) is greater than the background noise (L_{90}) with height.

Keywords: Aspect ratio, noise attenuation, traffic noise, urban street canyon.

CANYON-like streets in urban areas vary considerably in width and in the height of the buildings which border them¹. The facades of some of the buildings are plain and some have balconies. A majority of buildings in residential streets as well as some of the office buildings in commercial streets has balconies. The facades at ground level can be even more complex. The ground floor is generally set back with colonnades.

Some noise measurements were taken in street canyons of Bengaluru city. The measurements were made to assess the effect of noise level in the vertical direction above street level. This study aims to provide guidance about the effect on the external noise environment of the street width, aspect ratio and the height of the location above street level. This requires assessment of the relative significance of the direct sound and the reverberant noise level in the street canyon. Other important factors to be considered are the traffic density and noise associated with it in the street. The ratio of the height of the buildings in street canyons (H) to the width of the street (w) is known as the ‘aspect ratio’ (AR) of the street with assumption that the buildings on either side are at same height. However in reality, this may not be the case. In this study, the average height of the buildings in street canyons has been taken to get $AR = (H_1 + H_2)/2w$ (Figure 1). The facade of building also varies considerably with and without balconies.

Noise measurements were made in Bengaluru at nine selected street canyons comprising residential zone, commercial zone, silent zone and heavy traffic zone (Table 1). In each street, canyon measurements were taken outside the windows of buildings. The aim of these noise measurements was to assess the vertical variation of noise level with respect to measurement location above

*For correspondence. (e-mail: halkoti@gmail.com)